

**CONVERSION CHART FOR
60° METRIC THREADS**

PITCH MM	WIRE SIZE		ADD		CONSTANT	
	MM	INCH	MM	INCH	MM	INCH
0.5	.4572	.018	.6138	.02417	.9386	.03696
0.6	.4572	.018	.4623	.01820	.8520	.03364
0.7	.4572	.018	.3107	.01223	.7654	.03013
0.75	.4572	.018	.2349	.00925	.7221	.02843
0.8	.6096	.024	.6164	.02427	1.1360	.04472
1.0	.6096	.024	.3133	.01233	.9628	.03790
1.25	.7366	.029	.3154	.01242	1.1273	.04438
1.5	1.0160	.040	.7747	.03050	1.7490	.06886
1.75	1.0160	.040	.3958	.01568	1.5324	.06033
2.0	1.1430	.045	.3979	.01567	1.6969	.06681
2.5	1.3970	.055	.4021	.01583	2.0259	.07976
3.0	1.6002	.063	.2540	.01000	2.2025	.08671
3.5	2.0574	.081	.8678	.03416	3.1411	.12367
4.0	2.3358	.092	.9482	.03733	3.5463	.13962
4.5	2.7432	.108	1.4096	.05550	4.3325	.17057
5.0	2.7432	.108	.6519	.02566	3.8995	.15352
5.5	3.0480	.120	.8085	.03183	4.3808	.17247
6.0	3.2258	.127	.5841	.02300	4.4812	.17643

ONE INCH EQUALS 25.400 MILLIMETERS

0.03937 INCH EQUALS ONE MILLIMETER

**THREAD CHART
FOR ALL U.S. 60° THREADS**


Select the proper wire size for either the number of threads per inch (US) or thread pitch (metric)

Measured pitch dia (E) equals measurement over wires (M) minus decimal in "CONST" column

Note: Basic P.D. equals basic major diameter plus decimal in "ADD" column minus decimal in "CONST" column

THREADS PER IN.	WIRE SIZE	ADD	CONST	THREADS PER IN.	WIRE SIZE	ADD	CONST
48	.018	.02243	.03596	11 1/2	.055	.03321	.08969
44	.018	.01956	.03432	11	.055	.02722	.08627
40	.018	.01611	.03235	10	.055	.01345	.07840
36	.018	.01190	.02994	9	.063	.02061	.08277
32	.024	.02464	.04494	8	.072	.02656	.10775
28	.024	.01787	.04107	7 1/2	.061	.04093	.12753
27	.024	.01587	.03993	7	.081	.02649	.11928
24	.029	.02385	.05092	6	.092	.02341	.13168
20	.029	.01122	.04370	5 1/2	.108	.04845	.16654
18	.032	.01180	.04789	5	.120	.05639	.18679
16	.040	.02528	.06587	4 1/2	.127	.04421	.18855
14	.040	.01175	.05814	4	.143	.05011	.21249
13	.045	.01842	.06838	3 1/2	.185	.12199	.30756
12	.055	.03870	.09283	3	.185	.04962	.26632

Three wire method of checking pitch diameter of screw threads.

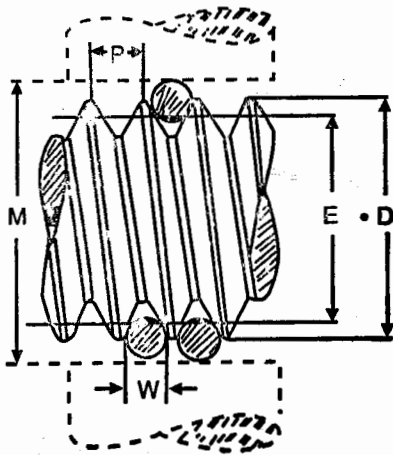

M = Measurement over wires.

E = Pitch diameter of thread.

D = Basic major or outside diameter.

W = Wire diameter.

P = Thread pitch

$M = E + \text{Const.}$

$E = M \cdot \text{Const.}$

$\text{Const.} = 3W.86603p$ (found in chart)

The maximum and minimum pitch diameter (**E**) for each class of thread can be found in machinery's hand book